

Project Name

Bennett Bridge

Type


O3-D

Catalog / Part Number


LBL 120 MRGBWP M LSLH DMX/RDM 3GV UL

Qty

14

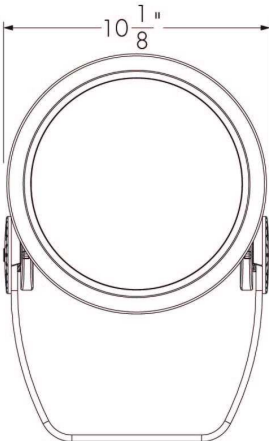

Front View

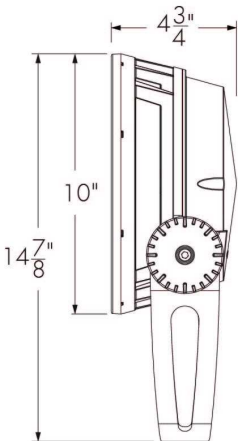

Side View

Photometric Summary (Discrete RGBW40K)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
VN (6°)	2,642	137,663
NS (10°)	2,829	100,343
NF (20°)	2,795	26,212
M (30°)	2,555	11,552
FL (40°)	2,409	5,948
WFL (60°)	1,999	2,075
Asymmetric		
NAS	2,939	45,274 (@2.5°)
WW	2,434	10,817 (@5°)

1. Based on RGBW40K full output.
2. Photometric performance is measured in compliance with IESNA LM-79-24.
3. Refer to the [Lumenbeam Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Photometric Summary (Opticolor+ MRGBWP)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
NS (10°)	2,505	47,745
NF (20°)	2,370	15,378
M (30°)	2,322	8,565
FL (40°)	2,360	6,373
WFL (60°)	2,294	2,345
VWFL (90°)	2,089	1,064

1. Based on MRGBWP full output, white set to 3000K.
2. Photometric performance is measured in compliance with IESNA LM-79-24.
3. Refer to the [Lumenbeam Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Description

The Lumenbeam Large Color Changing is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. The system offers numerous options including optics for flood or accent lighting, a choice of color mixing, as well as various accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colors and Color Temperature (Discrete)	RGBA: Discrete Red, Green Bue, Amber RGBW30K: Discrete Red, Green, Blue, White 30K RGBW40K: Discrete Red, Green, Blue, White 40K RGB: Discrete Red, Green, Blue
Colors and Color Temperature (Opticolor™)	MRGBA: Opticolor™ Mix-at-Source Red, Green, Blue, PC Amber
Colors and Color Temperature (Opticolor+™)	MRGBWP: Opticolor+™ Mix-at-Source Red, Green, Blue Plus White Settable Range 24K to 65K MRGBWP Typical Color Rendering: 2700K-5000K: 90+ CRI 2500K-6500K: 80+ CRI MRGRBWP: Opticolor+™ Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 24K to 65K
Optics (Nominal Distribution)	VN: VN (6°) NS: NS (10°) NF: NF (20°) M: M (30°) FL: FL (40°) WFL: WFL (60°) VWFL: VWFL (90°) NAS: NAS (Narrow Asymmetric) WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution LSLV: Linear Spread Lens Vertical Distribution


Photometric Summary (Opticolor MRGBA)

Symmetric

	Delivered output (lm)	Intensity (peak cd)
NS (10°)	2,465	46,981
NF (20°)	2,332	15,132
M (30°)	2,284	8,428
FL (40°)	2,322	6,271
WFL (60°)	2,257	2,308
VWFL(90°)	2,056	1,047

1. Based on MRGBA full output.
2. Photometric performance is measured in compliance with IESNA LM-79-24.
3. Refer to the [Lumenbeam Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Optic

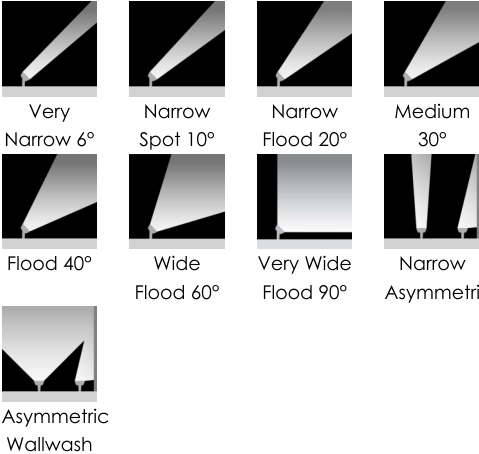

Option	SY: Short Yoke SR Y: Short Rotational Yoke RY: Rotational Yoke 3GV: 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications CRC: Corrosion-Resistant Coating for Hostile Environments
Cable Color	BK: Black WH: White
Power Consumption	50 W
Warranty	5-year limited warranty

Performance

Maximum Delivered Output (Discrete)	2,931 lm (RGB full output, NAS @ 2.5°, DMX/RDM) 2,880 lm (RGBW30K full output, NAS @ 2.5°, DMX/RDM) 2,939 lm (RGBW40K full output, NAS @ 2.5°, DMX/RDM) 2,401 lm (RGBA full output, NAS @ 2.5°, DMX/RDM)
Maximum Delivered Output (Opticolor)	2,465 lm (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Output (Opticolor+)	2,505 lm (MRGBWP full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Discrete)	137,268 cd at nadir (RGB full output, VN 6°, DMX/RDM) 134,910 cd at nadir (RGBW30K full output, VN 6°, DMX/RDM) 137,663 cd at nadir (RGBW40K full output, VN 6°, DMX/RDM) 112,471 cd at nadir (RGBA full output, VN 6°, DMX/RDM)
Maximum Delivered Intensity (Opticolor)	46,981 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Opticolor+)	47,745 cd at nadir (MRGBWP full output, NS 10°, DMX/RDM)
Illuminance at Distance (Discrete)	Minimum 1 fc at 372 ft (RGB full output, VN 6°, DMX/RDM) Minimum 1 fc at 369 ft (RGBW30K full output, VN 6°, DMX/RDM) Minimum 1 fc at 373 ft (RGBW40K full output, VN 6°, DMX/RDM) Minimum 1 fc at 337 ft (RGBA full output, VN 6°, DMX/RDM)
Illuminance at Distance (Opticolor)	Minimum 1 fc at 217 ft (MRGBA full output, NS 10°, DMX/RDM)
Illuminance at Distance (Opticolor+)	Minimum 1 fc at 219 ft (MRGBWP full output, NS 10°, DMX/RDM)
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report

Physical

Housing Material	Low copper content high pressure die-cast aluminum
Yoke Material	Heavy aluminum (standard yoke included)
Lens Material	Clear tempered glass
Dome Lens Material	Acrylic

Color and Color Temperature



opticolor+™
Opticolor™
Mix-at-Source
Red, Green,
Blue Plus White
Settable
Range 24K to
65K



opticolor™
Opticolor™
Mix-at-Source
Red, Green,
Blue, PC
Amber



RGBA
Red Green Blue Amber
Discrete Red,
Green Bue,
Amber



RGBW
Red Green Blue White
Discrete Red,
Green, Blue,
White 30K



RGBW
Red Green Blue White
Discrete Red,
Green, Blue,
White 40K



RGB
Red Green Blue
Discrete Red,
Green, Blue



opticolor+™
Opticolor™
Mix-at-Source
Red, Green,
Royal Blue Plus
White Settable
Range 24K to
65K

Control



DMX/RDM



Ratings

IP66 IK10

Certifications





Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	12 lbs
EPA	Front = 0.64 ft², Side = 0.21 ft²

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable
Conductors	3C #16-3 (LT control) 5C #16-5 (DALI8 control) 6C #14-3/ #24-3 (DMX/RDM control)
Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Enabled Dimming 0.1%
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit, 3 channels (RGB) or 4 channels (RGBW30K, RGBW40K, RGBA, MRGBA, MRGBWP and MRGRBWP)

Environmental

Storage Temperature	-40 °F to 158 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 Wet location rated
Impact Resistance Rating	IK10
Application Wind Speed	Luminaires were designed based on AASHTO 2013 standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application

Accessories (Order Separately)

Optical Accessories	Lumenbeam Large Snoot, Lumenbeam Large Snoot Wide, Lumenbeam Large Visor, Lumenbeam Large Linear Spread Lens Adjustable, Lumenbeam Large Wire Guard, Lumenbeam Large Dome Lens
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
Dagnostic and Addressing Tools	LumenID (LID)


Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Color Point Information

MRGBWP

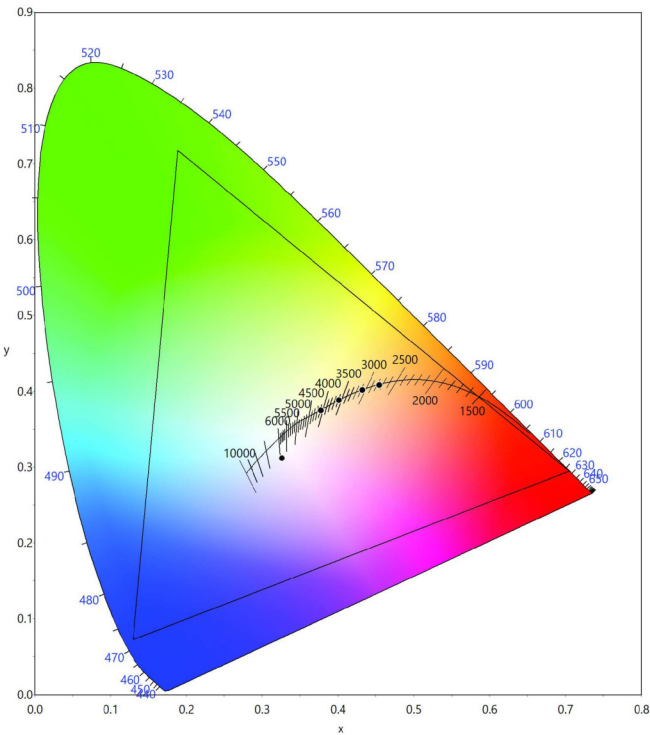

Dominant Wavelength and Chromaticity


	Dominant Wavelength	Chromaticity	
		Cx	Cy
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optidrive	0.4545	0.4081
30K Optidrive	0.4318	0.4017
35K Optidrive	0.4010	0.3883
40K Optidrive	0.3773	0.3747


Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.

Mounting Options

SRY - Short Rotational Yoke

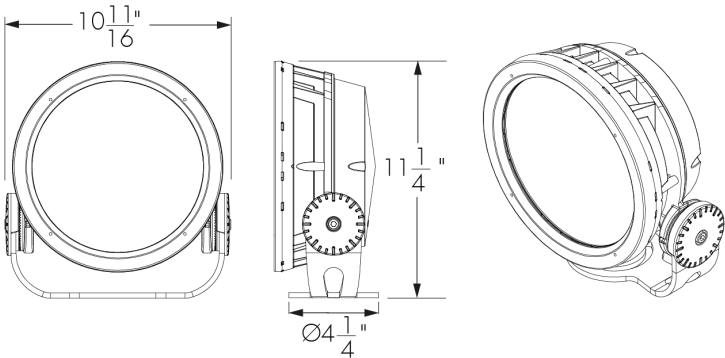


RY - Rotational Yoke

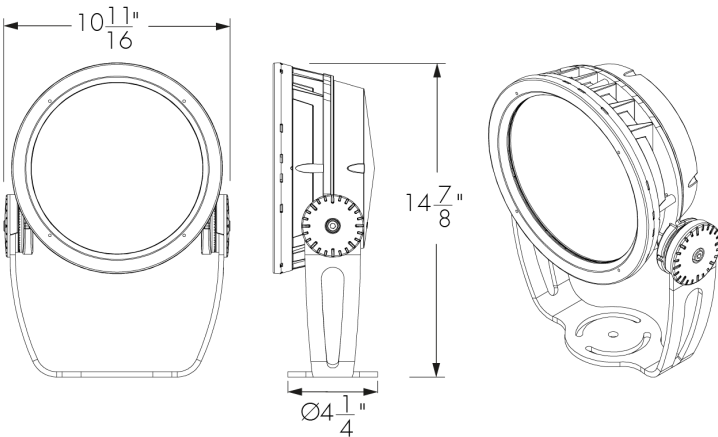


Mounting Details

Mounting Hole Pattern - Standard And Short Yoke




3 bolts are required for wind and vibration resistance, provided by others.

Mounting Hole Pattern - Rotational Yoke



3 bolts are required for wind and vibration resistance, provided by others.

Adjustable Pivot Limits

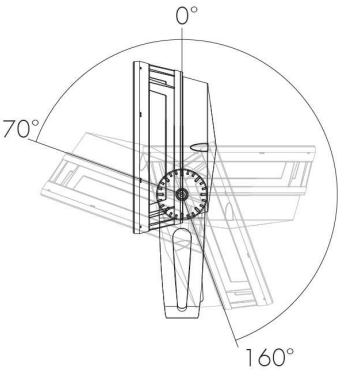

Standard yoke

Optical Options – Discrete

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
VN	7° x 60°
NS	13° x 66°
NF	16° x 62°
M	23° x 65°
FL	33° x 70°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Optical Options - Opticolor™ and Opticolor+

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
NS	11° x 61°
NF	19° x 66°
M	26° x 70°
FL	31° x 71°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for VN, WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Mounting Accessories (Order Separately)


Round Pole Mounting Accessory

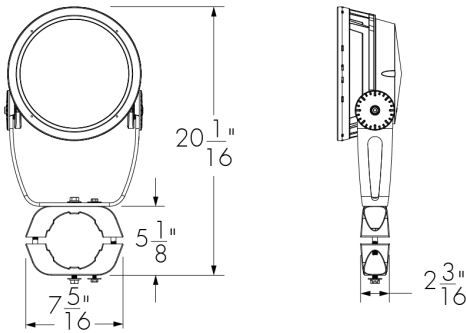

PM4 model shown. Consult factory for square pole section.



PM4-1, PM4.5-1, PM5-1 - Round pole mounting accessory - single fixture




PM4-2, PM4.5-2, PM5-2 - Round pole mounting accessory - twin fixtures
*One bracket assembly is supplied per 2 fixtures unless otherwise specified.

	PM4	PM4.5	PM5
For pole Ø	4" ± 1/16	4.5" ± 1/16	5" ± 1/16

Consult factory for other pole diameters.


PLTU - Universal Yoke

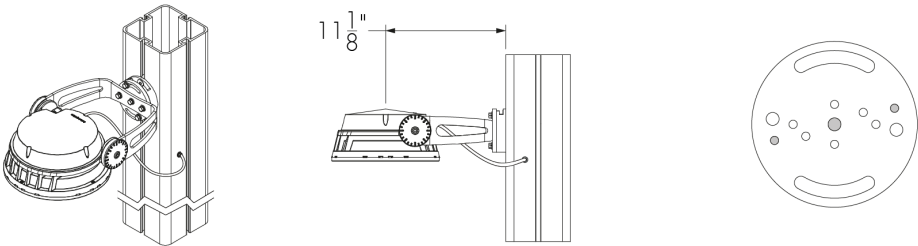


Refer to the Universal Yoke specification sheet and Pole installation instructions for more details. Square Lumentech profile shown.

The mounting holes used for this fixture are shown in gray.

Tenon Adapter

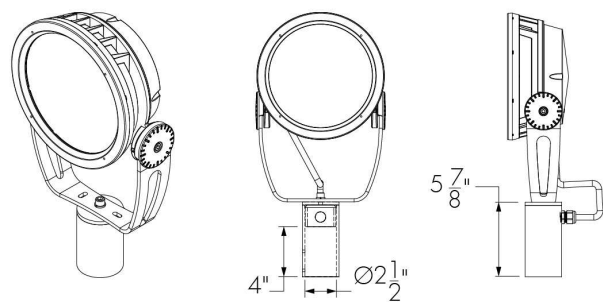

TN2 - Tenon adapter to fit on 2 3/8 in O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

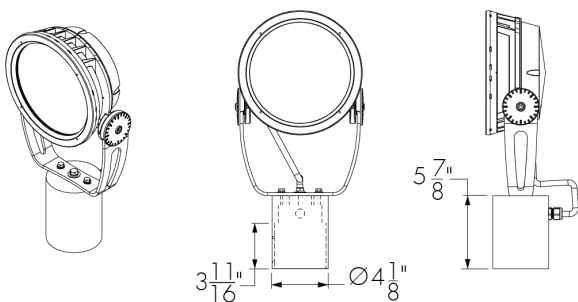


TN4 - Tenon adapter to fit on 4 in O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

Optical Accessories (Order Separately)

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


SN - Snoot

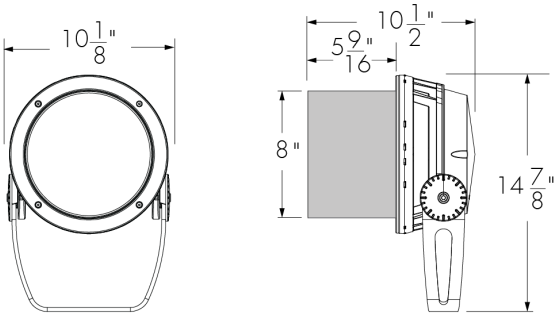

LBSN-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


SNW - Snoot Wide

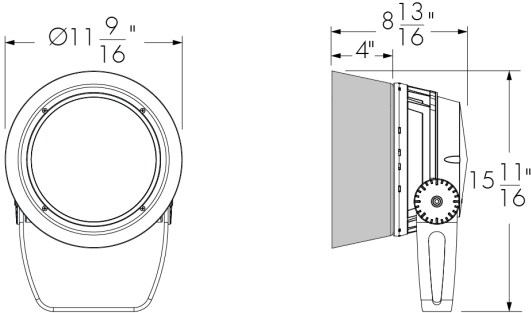

LBSNW-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


VS - Visor

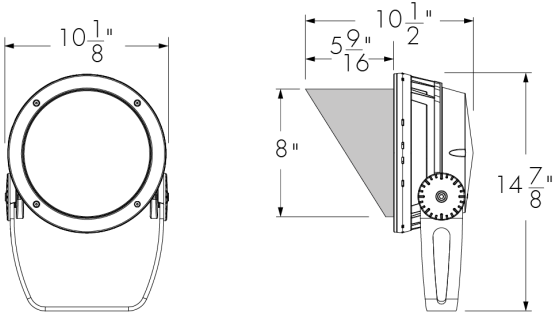

LBLVS-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


LSLA - Linear Spread Lens Adjustable

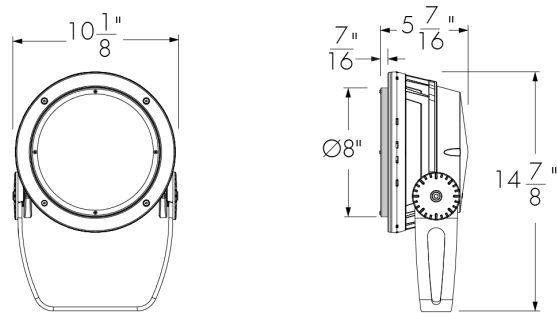

LBLSLA-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

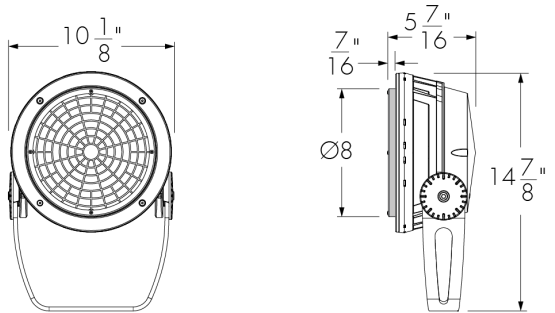

LBLWG-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBSNLSLA	N/A*	LBLVLSLA
Wire guard	LBSNWG	N/A	LBLVSWG

Accessory combinations must be ordered together on a single line
Ex: A snoot + wire guard combination order code is LBSNWG-FINISH-BK-OPTIONS. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


DM - Dome Lens

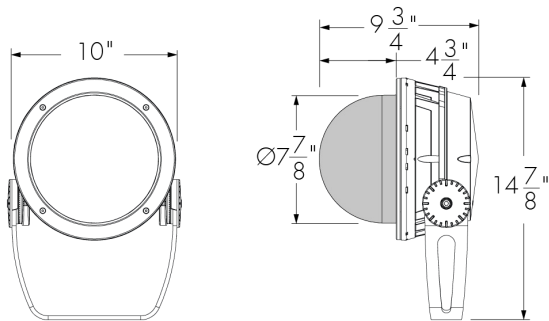


LB LDM-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Dome - Short Yoke - Pivot limits

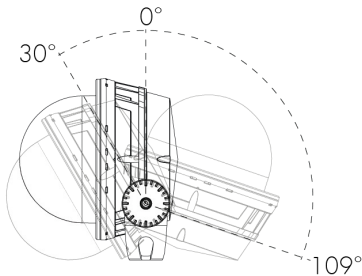

Dome - Standard Yoke - Pivot limits

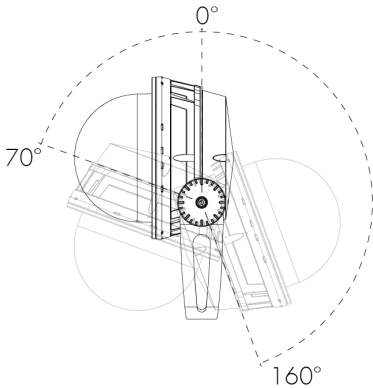


Dome Lens is available with WFL Optic only. The WFL optic must be specified for the fixture.

Dome Lens cannot be combined with other optical accessories.

Dome Lens will affect beam distribution. Consult factory for application support and photometric performance.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147677

Diffuser Lens 2 (2 Notches)




147678

Diffuser Lens 3 (3 Notches)




147679

Diffuser Lens 4 (4 Notches)




147680

Diffuser Lens 5 (5 Notches)



147681

Diffuser Lens 6 (6 Notches)



147682

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)	FL		WFL			
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-**FINISH**-LBALK **LBM/LBMP**: LBMLSLSLA-**FINISH**-LBALK **LBL/LBLP**: LBLLSLSLA-**FINISH**-LBALK **LBG/LBGP**: LBGLSLA-**FINISH**-LBALK **LBX/LBXP**: LBXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

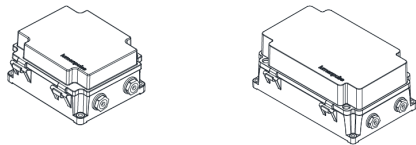

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

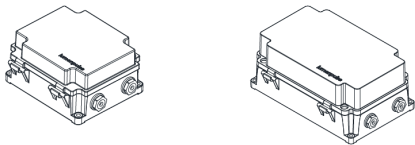

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

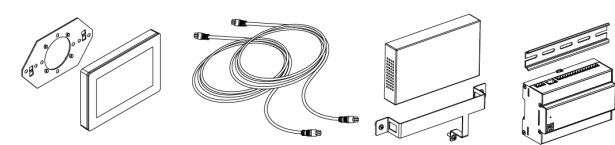

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit



The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

EPA Guide


	LBL	LBL with Snoot	LBL with Visor	LBL with Snoot Wide	LBL with Dome Lens
EPA front (sq ft)	0.642	0.642	0.642	1.016	0.642
EPA side (sq ft)	0.214	0.473	0.473	0.452	0.300

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

Star Layout (DMX/RDM)

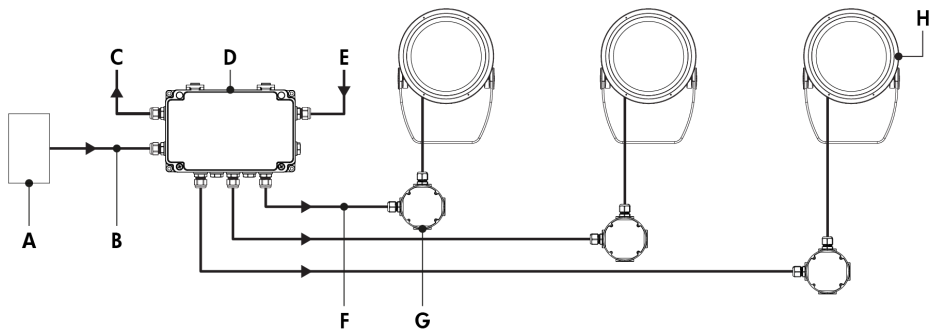

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenbeam Large

Star Layout (DMX/RDM) - Wiring Detail



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nut (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBL	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGRBWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 50 watts per fixture.

Daisy Chain Layout (DMX/RDM)

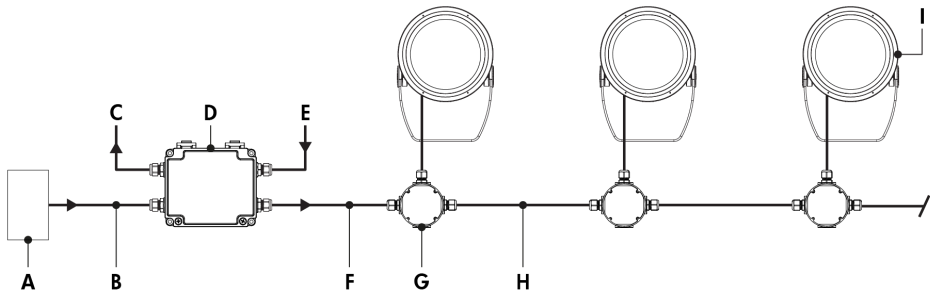


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenbeam Large

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)

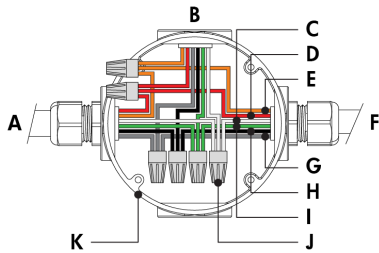

- A - From CBX or previous fixture
- B - To fixture
- C - Neutral
- D - Data +
- E - Data -
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Wire-nut (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A - From CBX or previous fixture
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nut (by others)
- K - Junction box (by others)

Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBL	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGRBWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 50 watts per fixture.

How to Order

LBL	120	MRGBWP	M	LSLH	Unselected	DMX/RDM	3GV	UL	Unselected	Unselected	
Housing	Voltage	Color and Color Temperature	Optic	Optical Option (13) (15) (14)	Finish	Control	Option	Certification	Cable Length (23) (29)	Cable Color	Buy America.n Act
LBL Lumenbeam™ Large	100 100 Volts 120 120 Volts 208 208 Volts 220 220 Volts 240 240 Volts 277 277 Volts	MRGBWP Opticolor+™ Mix-at- Source Red, Green, Blue Plus White Settable Range 24K to 65K (1) (2) (3) (4) (5) MRGBA Opticolor™ Mix-at- Source Red, Green, Blue, PC Amber (2) (6) RGBA Discrete Red, Green Bue, Amber RGBW30K Discrete Red, Green, Blue, White 30K (1) RGBW40K Discrete Red, Green, Blue, White 40K (1) RGB Discrete Red, Green, Blue MRGRBWP Opticolor+™ Mix-at- Source Red, Green, Royal Blue Plus White Settable Range 24K to 65K (1) (2) (3) (4) (5) (7) (8)	VN Very Narrow 6° (9) (10) NS Narrow Spot 10° (9) NF Narrow Flood 20° (9) M Medium 30° (9) FL Flood 40° (9) WFL Wide Flood 60° (9) (11) VWFL Very Wide Flood 90° (9) (12) NAS Narrow Asymmetric (9) (10) WW Asymmetric Wallwash (9) (10)	LSLH Linear Spread Lens Horizontal Distribution (14) LSLV Linear Spread Lens Vertical Distribution (14) WH Smooth White BKTX Textured Black BRZTX Textured Bronze Non- Metallic GRATX Textured Medium Gray GRNTX Textured Green WHTX Textured White CC Custom Color & Finish (17) (18) (19)	BK Black Sandtex® BRZ Bronze Sandtex® SI Silver Sandtex® WH Smooth White BKTX Textured Black BRZTX Textured Bronze Non- Metallic GRATX Textured Medium Gray GRNTX Textured Green WHTX Textured White CC Custom Color & Finish (17) (18) (19)	LT Lumentalk (20) (21) DMX/RDM DMX/RDM Enabled Dimming (22) (23) DALIT8 DALI 2 T8 Enabled Dimming 0.1% (5) (24)	SY Short Yoke SR Short Rotational Yoke (25) RY Rotational Yoke (25) 3GV 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications CRC Corrosion- Resistant Coating (26) (27)	UL UL Compliant CE CE Compliant (28) CEII CE Compliant Class II Double Insulated (28)	3FT 3 ft (23) (29) 10FT 10 ft 20FT 20 ft 30FT 30 ft 50FT 50 ft 70FT 70 ft 100FT 100 ft	BK Black WH White (30)	BAA Buy America.n (30) (31)

Notes:

1. Consult factory for the availability of more color and CCT options.

2. Not available for VN, NAS and WW optics.

3. MRGBWP and MRGRBWP can be configured to MRGB via RDM, consult factory for more details.

4. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumenID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 2200K-8000K.

5. Consult factory for DALI T8 applications with MRGBWP or MRGRBWP and a CCT other than 3000K.

6. Consult factory for the availability of more color and CCT options (e.g. royal blue).

7. Longer lead time of 10-12 weeks.

8. Consult factory for photometric performance.

9. Factory installed, not interchangeable on site.

10. Not available with MRGBA, MRGBWP and MRGRBWP color temperature options.

11. A dome lens accessory is available, order separately. For compatibility, a WFL optic must be specified for the fixture.

12. Available with MRGBA, MRGBWP and MRGRBWP color temperature options only.

13. Optical options are factory installed and cannot be changed in the field.

14. Field adjustable spread lens optical accessory available, order separately.

15. Not available with WFL, NAS and WW optics when combined with RGB color temperature option.

16. Not available with VN, WFL, VWFL, NAS and WW optics when combined with MRGBA, MRGBWP or MRGRBWP color temperature options.
17. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

18. Setup charges apply for RAL colors. Consult factory for details.

19. Longer lead times can be expected for custom RAL color finishes.

20. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

21. Not available with Class II double insulated option.

22. A control box (CBX) and LumenID (LID) must be specified.

23. Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.

24. DALI 2 T8 controller required, provided by others. DALI 2 T8 control uses a single DALI short address.

25. Consult factory for applications with 3GV requirements.

26. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

27. Setup charges apply. Consult factory for details.

28. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.

29. 3 ft cable length is standard unless otherwise specified.

30. Not available with CE or CEII certification options.

31. Contact your Lumenpulse Sales Representative for more information on order volume details.